



## Pro65™ Plastic Pipe Tracking Aid



**Use a locator to track plastic pipe underground**

- A flexible snake that can be tracked with a locator
- Insert the tracking rod into PVC or vinyl pipe to follow the pipe path and find the end of the rod

### Pro65™ Features


- Use your 33 kHz locator (e.g., Pro900™, Pro871™, Pro290™) to track plastic pipe
- Can be used with pipe down to 0.5 inches diameter
- Bend radius of 2 inches
- Path detection depth of 5 feet
- Tip or Sonde detection up to 7 feet

## SPECIFICATIONS

Working Frequency†	33 kHz
Path Detection Depth	5 feet
Tip Detection Depth	7 feet
Sonde Detection Depth	7 feet
Rod Length	65 feet
Rod Diameter	0.2 inches
Minimum Bend Radius	2.0 inches
Reel Dimensions	5.9 x 4.7 x 9.8 inches
Reel Weight	2.75 pounds
Operating Temperature	-4°F to 122°F
Water and Dust Rating	IP65

† Locator transmitter frequency

## APPLICATION

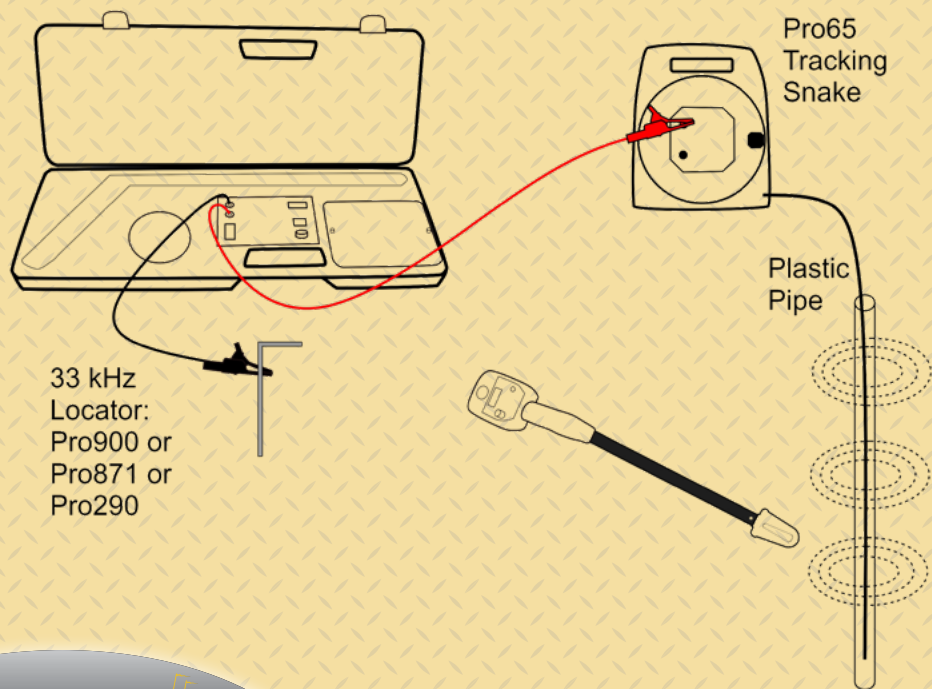

Distributed by:



For more information contact:

**Armada Technologies**

3596 76th St. SE

Caledonia, MI 49316

**Phone: (616) 803-1080**

**Fax: (616) 803-1083**

**www.armadatech.com**